

SEAMLESS PACKAGING

AUTOMATIC L-BAR SEALER BAGGING UNIT
SUITABLE FOR A WIDE RANGE OF PRODUCTS

L-SEALER

TECNOPEA



SEAMLESS PACKAGING L-SEALER

Automatic L-bar sealer bagging unit suitable for a wide range of products.
This machine can be connected to an automatic line or manually fed.


SEAMLESS PACKAGING

L-SEALER

Specifications	Values
Air pressure	6 bar
Air consumption	4,5 m ³ /hr
Installed power	4,2 Kw
Absorbed power	2,2 Kw
Min bag size	80 x 120 mm
Max bag size	250 x 500 mm
Bag heigth	Up to 250 mm

Features
Automatic sealing bar height control.
Center seal - automatically centers the seal mid-way between the top and the bottom of the package
Creating bags from a Polyolefin or Polyethylene film
PTFE coated sealing bar
PLC to control of all main functions.
User friendly LCD control panel
Single and multi-pack mode
Adjustable conveyor speed
High productivity
Very easy to use
Versatility

SEAMLESS PACKAGING L-SEALER

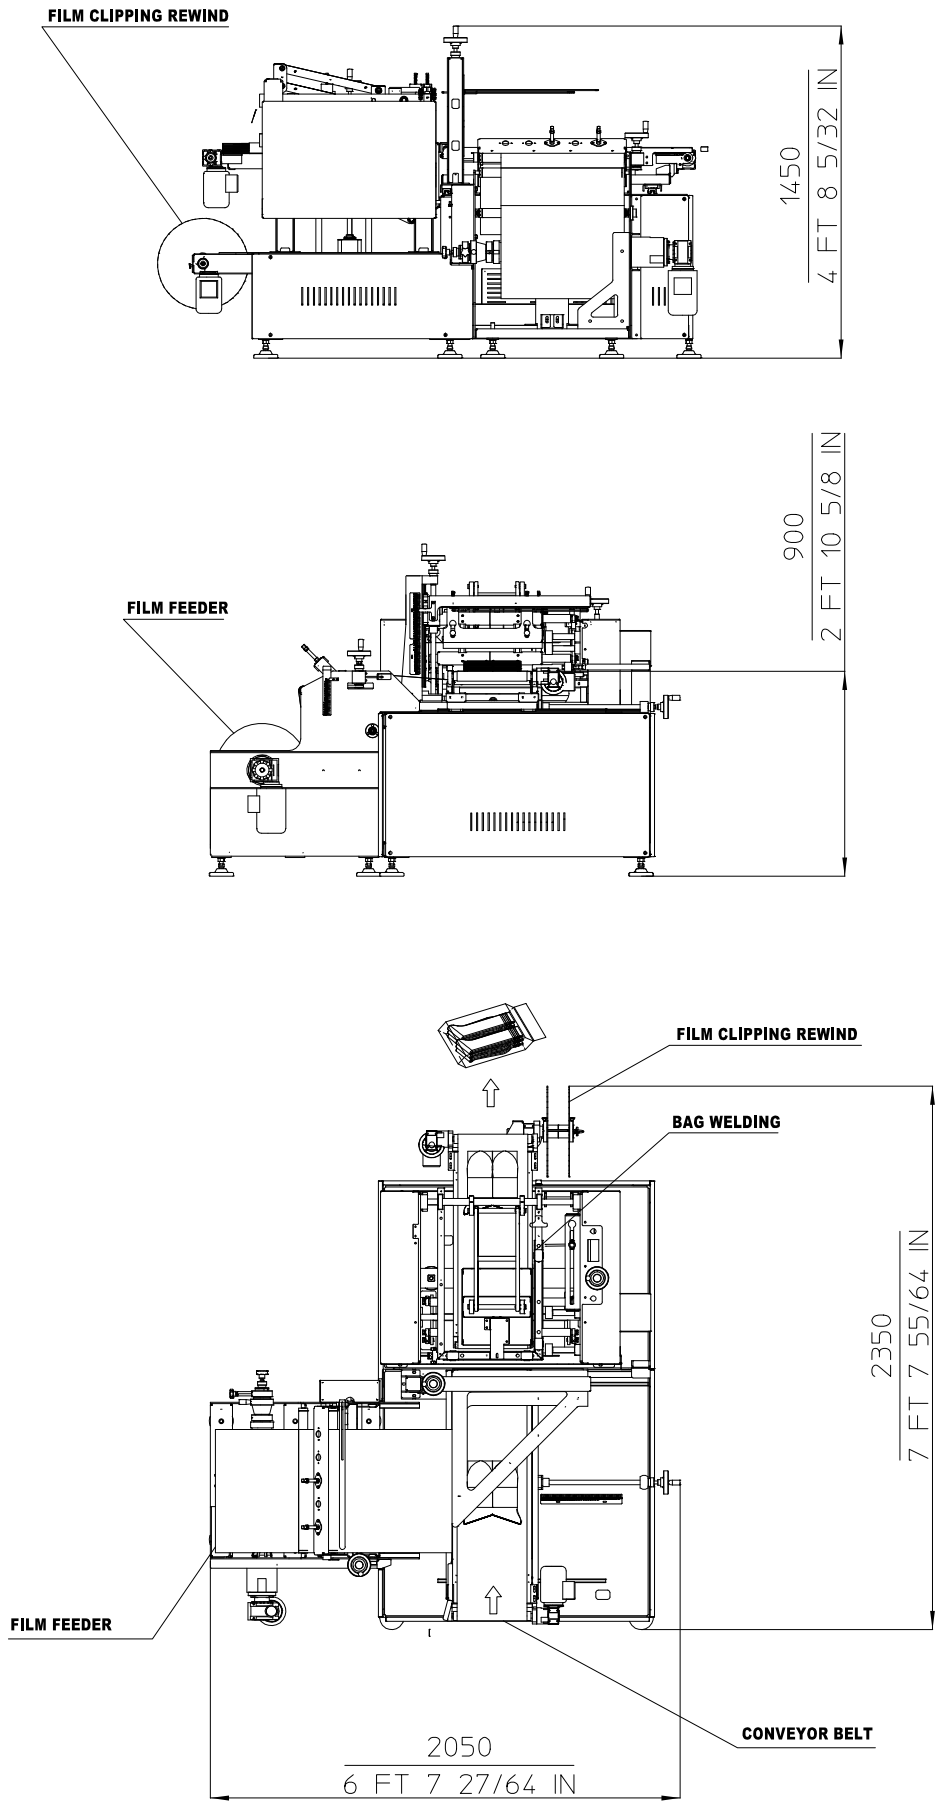

TECNOPEA



TECNOPEA S.R.L.

Via Don Eridano Torri, 2

25027 Quinzano d'Oglio, Brescia - Italy

Tel.: +39 030 992 3780 - Fax: +39 030 9923996

info@tecnopea.com - www.tecnopea.com